



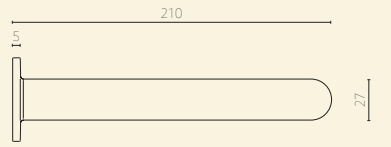




TONO Elements: Brassware




Wall Mounted Mixer With Round Spout

Features:
 Ø35 mm Ceramic cartridge
 Flow rate: 5.7 l/min at 3 bar
 Cartridge reliability meeting:
 European standard EN 817 and
 American standard ASME A112.18.1M
 Adjustable aerator
 Aerator for different building ratings available
 Ni-Cr coating tested to EN 248

Wall Mounted Mixer With Flat Spout


Features:
 Ø35 mm Ceramic cartridge
 Flow rate: 5.7 l/min at 3 bar
 Cartridge reliability meeting:
 European standard EN 817 and
 American standard ASME A112.18.1M
 Adjustable aerator
 Aerator for different building ratings available
 Ni-Cr coating tested to EN 248

Finishes:

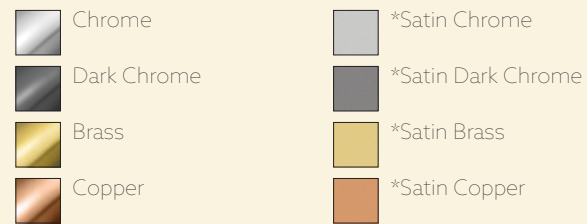





*Minimum order 50 pieces

Finishes:

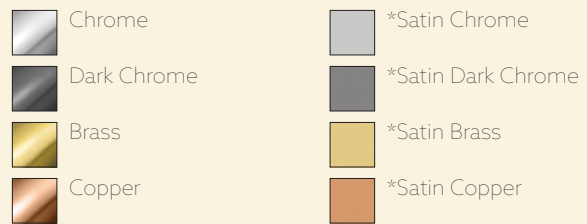

*Minimum order 50 pieces

TONO Elements: Brassware

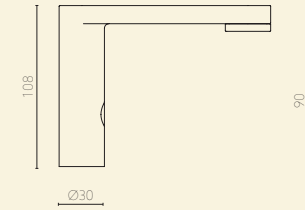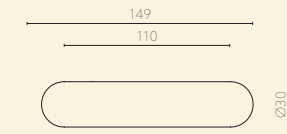


Wall Mounted Mixer

Features:
 Ø35 mm Ceramic cartridge
 Max. flow rate: 20 l/min at 3 bar
 Cartridge reliability meeting:
 European standard EN 817 and
 American standard ASME A112.18.1M
 Ni-Cr coating tested to EN 248
 1/2" connection

Sensor Tap

Features:
 Sensor-operated
 Flow rate: 5.7 l/min at 3 bar
 Ni-Cr coating tested to EN 248
 6V Battery connection
 Single water inlet
 Optional Ø48mm washer included
 Adjustable aerator
 Aerator for different building ratings available

Finishes:

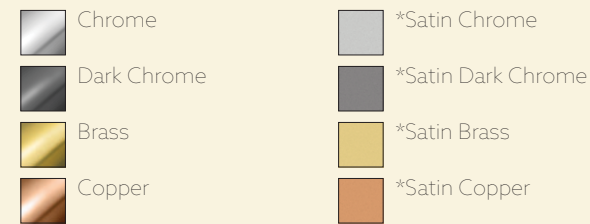

*Minimum order 50 pieces

Finishes:



*Minimum order 50 pieces